

**ARBORIST REPORT  
AND  
NATIVE OAK TREE INVENTORY**

**LINCOLN MEADOWS PROJECT SITE  
City of Lincoln, California**

**Prepared for:  
RBM Land Company, LLC  
P.O. Box 548  
Rocklin, CA 95677**

**Prepared by:**

**Edwin E. Stirtz  
ISA Certified Arborist WE-0510A  
Member, American Society of Consulting Arborists**



**SIERRA NEVADA ARBORISTS  
7425 W 4<sup>th</sup> Street  
Rio Linda, California 95673**

**October 8, 2014**

**TABLE OF CONTENTS**

	<u>Page</u>
COPYRIGHT STATEMENT .....	-i-
QUALIFICATION STATEMENT.....	-ii-
INTRODUCTION AND SCOPE .....	1
METHODOLOGY .....	2
INVENTORY EFFORT .....	2
Recommended Removals.....	3
CONSTRUCTION IMPACT ASSESSMENT.....	3
GENERAL COMMENTS AND ARBORISTS' DISCLAIMER.....	4-5
ASSUMPTIONS AND LIMITING CONDITIONS .....	6-7
DEFINITIONS AND RATINGS.....	8-9
GENERAL PROTECTION GUIDELINES .....	10-13
APPENDICES:	
A.    Field Map	

## **COPYRIGHT STATEMENT**

This consultant's report, dated October 8, 2014, is for the exclusive and confidential use of RBM Land Company, LLC concerning potential development of the Lincoln Meadows project site located in the City of Lincoln, California. Any use of this report, the accompanying appendices, or portions thereof, other than for project review and approval by appropriate governmental authorities, shall be subject to and require the written permission of Sierra Nevada Arborists. Unauthorized modification, distribution and/or use of this report, including the data or portions thereof contained within the accompanying appendices, is strictly prohibited.

## **QUALIFICATION STATEMENT**

Sierra Nevada Arborists is a fully insured, Rio Linda-based arboriculture consulting firm founded in January of 1998 by its Principal, Edwin E. Stirtz. Mr. Stirtz is an ISA Certified Arborist and a member of the American Society of Consulting Arborists and International Society of Arboriculture. Mr. Stirtz possesses in excess of 30 years of experience in horticulture and arboriculture, both maintenance and construction, and has spent the last 23 years as a consulting and preservation specialist in the Sacramento and surrounding regions.

## **INTRODUCTION**

Sierra Nevada Arborists is pleased to present to RBM Land Company, LLC this Arborist Report and Native Oak Tree Inventory for the trees located within and/or overhanging the property located at the Lincoln Meadows, Lincoln, California. This Arborist Report and Native Oak Tree Inventory memorializes tree data obtained by Edwin E. Stirtz, ISA Certified Arborist WE-0510A, at the time of field reconnaissance and inventory efforts on October 8, 2014.

## **SCOPE OF INVENTORY EFFORT**

The City of Lincoln Guidelines for Development Around Oak Trees (the “Guidelines”) state that the applicant for any project falling within the scope of the Guidelines (i.e., rezone, parcel map, development permit, subdivision map, conditional use permit, and/or Design Review Board approval or variance) will provide the Design Review Board with:

A tree survey with the accurate location, number, size, diameter (measured four and one-half feet above the ground), approximate height, and approximate canopy diameter of all oaks trees on the project.

The Guidelines state that the survey must be a part of the total development plan and must identify any tree or trees which could be affected by the proposed development. The Guidelines defines a “tree” as “any living oak tree having at least one trunk of six inches or more in diameter measured four and one-half feet above the ground, or a multi-trunked oak tree having an aggregate diameter of ten inches or more, measured four and one-half feet above the ground.”

At the request of RBM Land Company, LLC, on October 8, 2014, Edwin E. Stirtz of Sierra Nevada Arborists visited the property located at Lincoln Meadows, Lincoln, California. The purpose of this field reconnaissance effort was to identify, inventory and comment upon the current structure and vigor of the “protected trees” located within and/or overhanging the project boundaries as depicted on the Field Map.

This Arborist Report and Native Oak Tree Inventory presents information concerning the species, size and current condition of the “protected trees” within the proposed project area, along with initial pre-development recommendations on a tree-by-tree basis which logically follow the characteristics noted within the trees at the time of field inventory efforts. Information concerning the nature and extent of root system and canopy impacts which will be sustained by the trees from proposed development activities, along with specific tree-by-tree mitigation recommendations for the trees which will sustain encroachment into their protected root zones can be provided in a Supplemental Arborist Report and Construction Impact Assessment once development plans have been refined and finalized for the proposed project area.

## **METHODOLOGY**

Field reconnaissance revealed only one protected tree on site. The tag number for this tree has been rough plotted on the enclosed aerial exhibit for future reference.

At the time of field identification and inventory efforts specific data was gathered for each tagged tree including the tree's species, diameter and dripline measurements, and a visual assessment was made of the tree's root crown/collar, trunk, limbs and foliage. Utilizing this data the tree's overall structural condition and vigor were separately assessed ranging from "excellent"<sup>1</sup> to "poor" based upon the observed characteristics noted within the tree and the Arborist's best professional judgment. Ratings are subjective and are dependent upon both the structure and vigor of the tree. The vigor rating considers factors such as the size, color, and density of the foliage; the amount of deadwood within the canopy; bud viability; evidence of wound closure; and the presence or evidence of stress, disease, nutrient deficiency and insect infestation. The structural rating reflects the root crown/collar, trunk and branch configurations; canopy balance; the presence of included bark, weak crotches and other structural defects and decay and the potential for structural failure. Finally, notable characteristics were documented and *initial* recommendations on a tree-by-tree basis were made which logically followed the observed characteristics noted within the trees at the time of the field inventory effort. The initial recommendations are based on the assumption that the tree would be introduced into a developed environment and may require maintenance and/or may not be suitable for retention within a post-development setting.

## **INVENTORY EFFORT**

Field reconnaissance and inventory efforts found only one "protected tree" totaling 33 aggregate diameter inches within and/or overhanging the proposed project area. Composition of the one inventoried trees is as follows:

Tree #:	70
Common Name:	Valley Oak
Species:	( <i>Quercus lobata</i> )
Total DBH (inches):	33 inches
DLR (feet):	34 feet
<b><u>Conditional Assessment:</u></b>	
Root Crown:	Fair
Trunk:	Fair
Limbs:	Fair
Foliage:	Fair
Structure:	Fair
Vigor:	Fair
Notable Characteristics:	Southerly branch arcs to the ground
Recommendation:	Clean out crown

---

<sup>1</sup> It is rare that a tree qualifies in an "excellent" category, and it should be noted that there were no trees observed within the project area which fell within the criteria of an "excellent" or "good" rating. A complete description of the terms and ratings utilized in this report are found on pages 8-9.

### **Recommended Removals**

At this time, the tree inventoried has not been recommended for removal from the proposed project area due to the nature and extent of defects, compromised health, and/or structural instability noted at the time of field inventory efforts. If this tree was retained within the proposed project area it is our opinion that it may be hazardous depending upon its proximity to planned development activities.

### **CONSTRUCTION IMPACT ASSESSMENT**

This Arborist Report and Native Oak Tree Inventory is intended to provide to RBM Land Company, LLC, the City of Lincoln, and other members of the development team a detailed *pre-development review* of the species, size, and current structure and vigor of the trees within and/or overhanging the proposed project area. It is not an exhaustive review of the impacts which will be sustained from project implementation. At this early stage of the project specific root system and canopy impacts on a tree-by-tree basis cannot be definitively assessed until the site development, grading, and other improvement plans have been refined and finalized and data (i.e., tree numbers, dripline radius, and root protection zones) is properly depicted on the plans.

Since trees are living organisms whose condition may change at any time a complete assessment of construction impacts and specific recommendations to help mitigate for the adverse impacts which may be sustained by the trees from contemplated construction activities cannot be made until the development plans have been refined and finalized. Once final plans have been developed for the site a qualified ISA Certified Arborist with special expertise and demonstrated experience with construction projects in and among native and non-native trees should review those plans and provide a more detailed assessment of impacts, including identification of trees which may require removal to facilitate home construction and other contemplated site development activities. This review will be particularly important if structures and/or residential activities will fall within or near the fall zone of a tree which has been noted as exhibiting structural defects, questionable long-term longevity and/or a conditional rating which is less than “fair”, and for trees which measure 16 inches and greater in diameter which will be retained within close proximity to development as trees of this size may pose a more significant hazard if a sudden limb shed and/or catastrophic failure should occur. In addition, the review should include an assessment of root system and canopy impacts which will be sustained by the trees which will be retained within the proposed development area, along with specific recommendations on a tree-by-tree basis to help reduce adverse impacts of construction on the retained trees. In the meantime, this report provides some pre-development recommendations which logically follow the observed characteristics noted in the trees at the time of the field inventory efforts, as well as General Protection Measures which should be utilized as a guideline for the protection of trees which may be retained within the development area. These recommendations will require modification and/or augmentation as development plans are refined and finalized.

**GENERAL COMMENTS AND ARBORISTS' DISCLAIMER**

The City of Lincoln regulates both the removal of “protected trees” and the encroachment of construction activities within their driplines. Therefore, a tree permit and/or additional development authorization should be obtained from the City of Lincoln prior to the removal of any trees within the proposed project area. All terms and conditions of the tree permit and/or other Conditions of Approval are the sole and exclusive responsibility of the project applicant. It should be noted that prior to final inspection written verification from an ISA Certified Arborist may be required certifying the approved removal activities and/or implementation of other Conditions of Approval outlined for the retained trees on the site. Sierra Nevada Arborists cannot provide written Certification of Compliance unless we have been provided with a copy of the approved site development plans, applicable permits and/or Conditions of Approval, and are on site to monitor and observe regulated activities during the course of construction. Therefore, it will be necessary for the project applicant to notify Sierra Nevada Arborists well in advance (at least 72-hours prior notice) of any regulated activities which are scheduled to occur on site so that those activities can be properly monitored and documented for compliance certification.

Please bear in mind that implementation of the recommendations provided within this report will help to reduce adverse impacts of construction on the retained trees; however, implementation of any recommendations should not be viewed as a guarantee or warranty against the trees' ultimate demise and/or failure in the future. Arborists are tree specialists who use their education, knowledge, training and experience to examine trees, recommend measures to enhance the beauty and health of the trees and ***attempt to reduce the risk of living near trees***. Arborists cannot detect every condition that could possibly lead to the structural failure of a tree. There are some inherent risks with trees that cannot be predicted with any degree of certainty, even by a skilled and experienced arborist. Entities who choose to construct homes on wooded property are accepting a certain level of risk from unpredictable tree related hazards such as toppling in storms, limbs falling and fires that may damage property at some time in the future. Since trees are living organisms their structure and vigor constantly change over time, and they are not immune to changes in site conditions or seasonal variations in the weather. Further, conditions are often hidden within the tree and/or below ground. Arborists and other tree care professionals cannot guarantee that a tree will be healthy and/or safe under all circumstances or for a specific period of time. Likewise remedial treatments cannot be guaranteed. Trees can be managed but they cannot be controlled. To develop land and live near trees is to accept some degree of risk and the only way to eliminate all risk associated with trees would be to eliminate all of the trees. ***An entity who develops land and builds a home with a tree in the vicinity should be aware of and inform their future residents of this Arborists' Disclaimer, and be further advised that the developer and the future residents assume the risk that a tree could at any time suffer a branch and/or limb failure, blow over in a storm and/or fail for no apparent reason which may cause bodily injury or property damage.*** Sierra Nevada Arborists cannot predict acts of nature including, without limitation, storms of sufficient strength which can even take down a tree with a structurally sound and vigorous appearance.

Finally, the trees preserved within and/or overhanging the proposed project area will experience a physical environment different from the pre-development environment. As a result, tree health and structural stability should be regularly monitored. Occasional pruning, fertilization, mulch, pest management, replanting and/or irrigation may be required. In addition, ***provisions for monitoring both tree health and structural stability following construction must be made a priority***. As trees age, the likelihood of failure of branches or entire trees increases. Therefore, ***the future management plan must include an annual inspection*** by a qualified ISA Certified Arborist to keep abreast of the trees' changing condition(s) and to assess the trees' ongoing structural integrity and potential for hazard in a developed environment.

Thank you for allowing Sierra Nevada Arborists to assist you with this review. Please feel free to give me a call if you have any questions or require additional information and/or clarification.

Sincerely,



Edwin E. Stirtz  
ISA Certified Arborist WE-0510A  
Member, American Society of Consulting Arborists

**ASSUMPTIONS AND LIMITING CONDITIONS**

1. Any legal description provided to the consultant is assumed to be correct. Any titles and ownership to any property are assumed to be good and marketable. No responsibility is assumed for matters legal in character. Any and all property is appraised or evaluated as though free and clear, under responsible ownership and competent management.
2. It is assumed that any property is not in violation of any applicable codes, ordinances, statutes, or other governmental regulations.
3. Care has been taken to obtain all information from reliable sources. All data has been verified insofar as possible; however, the consultant can neither guarantee nor be responsible for the accuracy of information provided by others.
4. The consultant shall not be required to give a deposition and/or attend court by reason of this report unless subsequent contractual arrangements are made for in advance, including payment of an additional fee for such services according to our standard fee schedule, adjusted yearly, and terms of the subsequent contract of engagement.
5. Loss or alteration of any part of this report invalidates the entire report. Ownership of any documents produced passes to the Client only when all fees have been paid.
6. Possession of this report or a copy thereof does not imply right of publication or use for any purpose by any other than the person to whom it is addressed, without the prior expressed written or verbal consent of the consultant.
7. Neither all nor any part of the contents of this report, nor copy thereof, shall be conveyed by anyone, including the client, to the public through advertising, public relations, news, sales, or other media, without the prior expressed written or verbal consent of the consultant, particularly as to value conclusions, identity of the consultant, or any reference to any professional society or institute or to any initialed designation conferred upon the consultant as stated in his qualifications.
8. This report and any values expressed herein represent the opinion of the consultant and the consultant's fee is in no way contingent upon the reporting of a specified value, a stipulated result, the occurrence of a subsequent event, nor upon any finding to be reported.
9. Sketches, diagrams, graphs, drawings and photographs within this report are intended as visual aids and are not necessarily to scale and should not be construed as engineering or architectural reports or surveys. The reproduction of

information generated by other consultants is for coordination and ease of reference. Inclusion of such information does not constitute a representation by the consultant as to the sufficiency or accuracy of the information.

10. Unless expressed otherwise: 1) information contained in this report covers only those items that were examined and reflects the condition of those items at the time of inspection; and 2) the inspection is limited to visual examination of accessible items without laboratory analysis, dissection, excavation, probing or coring, unless otherwise stated.
11. There is no warranty or guarantee, expressed or implied, that problems or deficiencies of the plants or property in question may not arise in the future.
12. This report is based on the observations and opinions of Edwin E. Stirtz, and does not provide guarantees regarding the future performance, health, vigor, structural stability or safety of the plants described herein. Neither this author nor Sierra Nevada Arborists has assumed any responsibility for liability associated with the trees on or adjacent to this project site, their future demise and/or any damage which may result therefrom.
13. The information contained within this report is true to the best of the author's knowledge and experience as of the date it was prepared; however, certain conditions may exist which only a comprehensive, scientific, investigation might reveal which should be performed by other consulting professionals.
14. The legal description, dimensions, and areas herein are assumed to be correct. No responsibility is assumed for matters that are legal in nature.
15. Any changes to an established tree's environment can cause its decline, death and/or structural failure.

### **DEFINITIONS AND RATINGS**

Tree Number:	Corresponds to aluminum tag attached to the tree.
Species Identification:	Scientific and common species name.
Diameter (“DBH”):	This is the trunk diameter measured at breast height (industry standard 4.5 feet above ground level).
Dripline radius (“DLR”):	A radius equal to the horizontal distance from the trunk of the tree to the end of the farthest most branch tip prior to any cutting. When depicted on a map, the dripline will appear as an irregularly shaped circle that follows the contour of the tree’s branches as seen from overhead.
Protected Zone:	A circle equal to the largest radius of a protected tree’s dripline plus 1 foot.
Root Crown:	Assessment of the root crown/collar area located at the base of the trunk of the tree at soil level.
Trunk:	Assessment of the tree’s main trunk from ground level generally to the point of the primary crotch structure.
Limbs:	Assessment of both smaller and larger branching, generally from primary crotch structure to branch tips.
Foliage:	Tree’s leaves.
Overall Condition:	Describes overall condition of the tree in terms of structure and vigor.
Recommendation:	Pre-development recommendations based upon observed characteristics noted at the time of the field inventory effort.
Obscured:	Occasionally some portion of the tree may be obscured from visual inspection due to the presence of dense vegetation which, during the course of inspection for the arborist report, prevented a complete evaluation of the tree. In these cases, if the tree is to be retained on site the vegetation should be removed to allow for a complete assessment of the tree prior to making final decisions regarding the suitability for retention.

**TREE CONDITION RATING CRITERIA**

<b>RATING TERM</b>	<b>ROOT CROWN</b>	<b>TRUNK</b>	<b>LIMBS</b>	<b>FOLIAGE</b>	<b>STRUCTURE</b>	<b>VIGOR</b>
Good	No apparent injuries, decay, cavities or evidence of hollowing; no anchoring roots exposed; no indications of infestation or disease	No apparent injuries, decay, cavities or evidence of hollowing; no codominant attachments or multiple trunk attachments are observed; no indications of infestation or disease	No apparent injuries, decay, cavities or evidence of hollowing; below average amount of dead limbs or twigs; no major limb failures or included bark; callus growth is vigorous	Leaf size, color and density are typical for the species; buds are normal in size, viable, abundant and uniform throughout the canopy; annual seasonal growth increments are average or above average; no insect or disease infestations/ infections evident	No apparent structural defects; no weak crotches; no excessively weighted branches and no significant cavities or decay	Tree appears healthy and has little or no significant deadwood; foliage is normal and healthy
Fair	Small to moderate injuries, decay, cavities or hollowing may be evident but are not currently affecting the overall structure; some evidence of infestation or disease may be present but is not currently affecting the tree's structure	Small to moderate injuries, decay, cavities or hollowing may be evident; codominant branching or multiple trunk attachments or minor bark inclusion may be observed; some infestation or disease may be present but not currently affecting the tree's structure	Small to moderate injuries, decay or cavities may be present; average or above average dead limbs or twigs may be present; some limb failures or bark inclusion observed; callus growth is average	Leaf size, color and density are typical or slightly below typical for the species; buds are normal or slightly sparse with potentially varied viability, abundance and distribution throughout the canopy; annual seasonal growth increments are average or slightly below average; minor insect or disease infestation/infection may be present	Minor structural problems such as weak crotches, minor wounds and/or cavities or moderate amount of excessive weight; non-critical structural defects which can be mitigated through pruning, cabling or bracing	Tree appears stressed or partially damaged; minimal vegetative growth since previous season; moderate amount of deadwood, abnormal foliage and minor lesions or cambium dieback
Poor	Moderate to severe injuries, decay, cavities or hollowing may be evident and are affecting the overall structure; presence of infestation or disease may be significant and affecting the tree's structure	Moderate to severe injuries, decay, cavities or hollowing may be evident and are affecting the tree's structure; presence of infestation or disease may be significant and affecting the tree's structure	Severe injuries, decay or cavities may be present; major deadwood, twig dieback, limb failures or bark inclusion observed; callus growth is below average	Leaf size, color and density are obviously abnormal; buds are obviously abnormal or absent; annual seasonal growth is well below average for the species; insect or disease problems may be severe	Obvious major structural problems which cannot be corrected with mitigation; potential for major limb, trunk or root system failure is high; significant decay or dieback may be present	Tree health is declining; no new vegetative growth; large amounts of deadwood; foliage is severely abnormal

The ratings "good to fair" and "fair to poor" are used to describe trees that fall between the described major categories and have elements of both

**GENERAL PROTECTION GUIDELINES  
FOR TREES PLANNED FOR PRESERVATION**

Great care must be exercised when work is conducted upon or around protected trees. The purpose of these General Protection Measures is to provide guidelines to protect the health of the affected protected trees. These guidelines apply to all encroachments into the protected zone of a protected tree, and may be incorporated into tree permits and/or other Conditions of Approval as deemed appropriate by the applicable governing body.

- A circle with a radius measurement from the trunk of the tree to the tip of its longest limb, plus one foot, shall constitute the critical root zone protection area of each protected tree. Limbs must not be cut back in order to change the dripline. The area beneath the dripline is a critical portion of the root zone and defines the minimum protected area of each protected tree. Removing limbs that make up the dripline does not change the protected area.
- Any protected trees on site which require pruning shall be pruned by an ISA Certified Arborist prior to the start of construction work. All pruning shall be in accordance with the American National Standards Institute (ANSI) A300 pruning standards, ANSI Standard 2133.1-2000 regarding safety practices, and the International Society of Arboriculture (ISA) “Tree Pruning Guidelines” and Best Management Practices.
- Prior to initiating construction, temporary protective fencing shall be installed at least one foot outside the root protection zone of the protected trees in order to avoid damage to the tree canopies and root systems. Fencing shall be installed in accordance with the approved fencing plan prior to the commencement of any grading operations or such other time as determined by the review body. The developer shall contact the Project Arborist and the Planning Department for an inspection of the fencing prior to commencing construction activities on site.
- Signs shall be installed on the protective fence in four (4) equidistant locations around each individual protected tree. The size of each sign must be a minimum of two (2) feet by two (2) feet and must contain the following language:



**WARNING: THIS FENCE SHALL NOT BE REMOVED OR RELOCATED  
WITHOUT WRITTEN AUTHORIZATION FROM THE CITY OF  
LINCOLN MUNICIPAL SERVICES AGENCY**

Once approval has been obtained by the City of Lincoln Municipal Services Agency protective fencing shall remain in place throughout the entire construction period and shall not be removed, relocated, taken down or otherwise modified in whole or in part without prior written authorization from the Agency, or as deemed necessary by the Project Arborist to facilitate approved activities within the root protection zone.

- Any removal of paving or structures (i.e. demolition) that occurs within the dripline of a protected tree shall be done under the direct supervision of the Project Arborist. To the maximum extent feasible, demolition work within the dripline protection area of the protected tree shall be performed by hand. If the Project Arborist determines that it is not feasible to perform some portion(s) of this work by hand, then the smallest/lightest weight equipment that will adequately perform the demolition work shall be used.
- No signs, ropes, cables (except those which may be installed by an ISA Certified Arborist to provide limb support) or any other items shall be attached to the protected trees. Small metallic numbering tags for the purpose of identification in preparing tree reports and inventories shall be allowed.
- No vehicles, construction equipment, mobile homes/office, supplies, materials or facilities shall be driven, parked, stockpiled or located within the driplines of protected trees.
- Drainage patterns on the site shall not be modified so that water collects, stands or is diverted across the dripline of any protected tree.
- No trenching shall be allowed within the driplines of protected trees, except as specifically approved by the Planning Department as set forth in the project's Conditions of Approval and/or approved tree permit. If it is absolutely necessary to install underground utilities within the dripline of a protected tree the utility line within the protected zone shall be "bored and jacked" or performed utilizing hand tools to avoid root injury under the direct supervision of the Project Arborist.
- Grading within the protected zone of a protected tree shall be minimized. Cuts within the protected zone shall be maintained at less than 20% of the critical root zone area. Grade cuts shall be monitored by the Project Arborist. Any damaged roots encountered shall be root pruned and properly treated as deemed necessary by the Project Arborist.
- Minor roots less than one (1) inch in diameter encountered during approved excavation and/or grading activities may be cut, but damaged roots shall be traced back and cleanly cut behind any split, cracked or damaged area as deemed necessary by the Project Arborist.
- Major roots greater than one (1) inch in diameter encountered during approved excavation and/or grading activities may not be cut without approval of the Project Arborist. Depending upon the type of improvement being proposed, bridging techniques or a new site design may need to be employed to protect the roots and the tree.

- Cut faces, which will be exposed for more than 2-3 days, shall be covered with dense burlap fabric and watered to maintain soil moisture at least on a daily basis (or possibly more frequently during summer months). If any native ground surface fabric within the protected zone must be removed for any reason, it shall be replaced within forty-eight (48) hours.
- If fills exceed 1 foot in depth up to 20% of the critical root zone area, aeration systems may serve to mitigate the presence of the fill materials as determined by the Project Arborist.
- When fill materials are deemed necessary on two or three sides of a tree it is critical to provide for drainage away from the critical root zone area of the tree (particularly when considering heavy winter rainfalls). Overland releases and subterranean drains dug outside the critical root zone area and tied directly to the main storm drain system are two options.
- In cases where a permit has been approved for construction of a retaining wall(s) within the protected zone of a protected tree the applicant will be required to provide for immediate protection of exposed roots from moisture loss during the time prior to completion of the wall. The retaining wall within the protected zone of the protected tree shall be constructed within seventy-two (72) hours after completion of grading within the root protection zone.
- The construction of impervious surfaces within the dripline of a protected tree shall be minimized. When necessary, a piped aeration system shall be installed under the direct supervision of the Project Arborist.
- Preservation devices such as aeration systems, tree wells, drains, special paving and cabling systems must be installed in conformance with approved plans and certified by the Project Arborist.
- No sprinkler or irrigation system shall be installed in such a manner that sprays water or requires trenching within the dripline of a protected tree. An above ground drip irrigation system is recommended. An independent low-flow drip irrigation system may be used for establishing drought-tolerant plants within the protected zone of a protected tree. Irrigation shall be gradually reduced and discontinued after a two (2) year period.
- All portions of permanent fencing that will encroach into the protected zone of a protected tree shall be constructed using posts set no closer than ten (10) feet on center. Posts shall be spaced in such a manner as to maximize the separation between the tree trunks and the posts in order to reduce impacts to the tree(s).

- Landscaping beneath native oak trees may include non-plant materials such as bark mulch, wood chips, boulders, etc. Planting live material under protected native oak trees is generally discouraged, and is not recommended within six (6) feet of the trunk of a native oak tree with a diameter a breast height (DBH) of eighteen (18) inches or less, or within ten (10) feet of the trunk of a native oak tree with a DBH of more than eighteen (18) inches. The only plant species which shall be planted within the dripline of native oak trees are those which are tolerant of the natural, semi-arid environs of the tree(s).

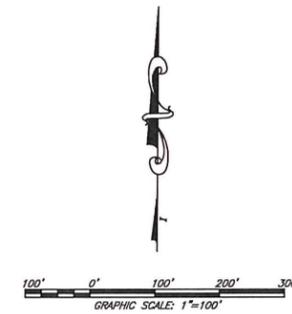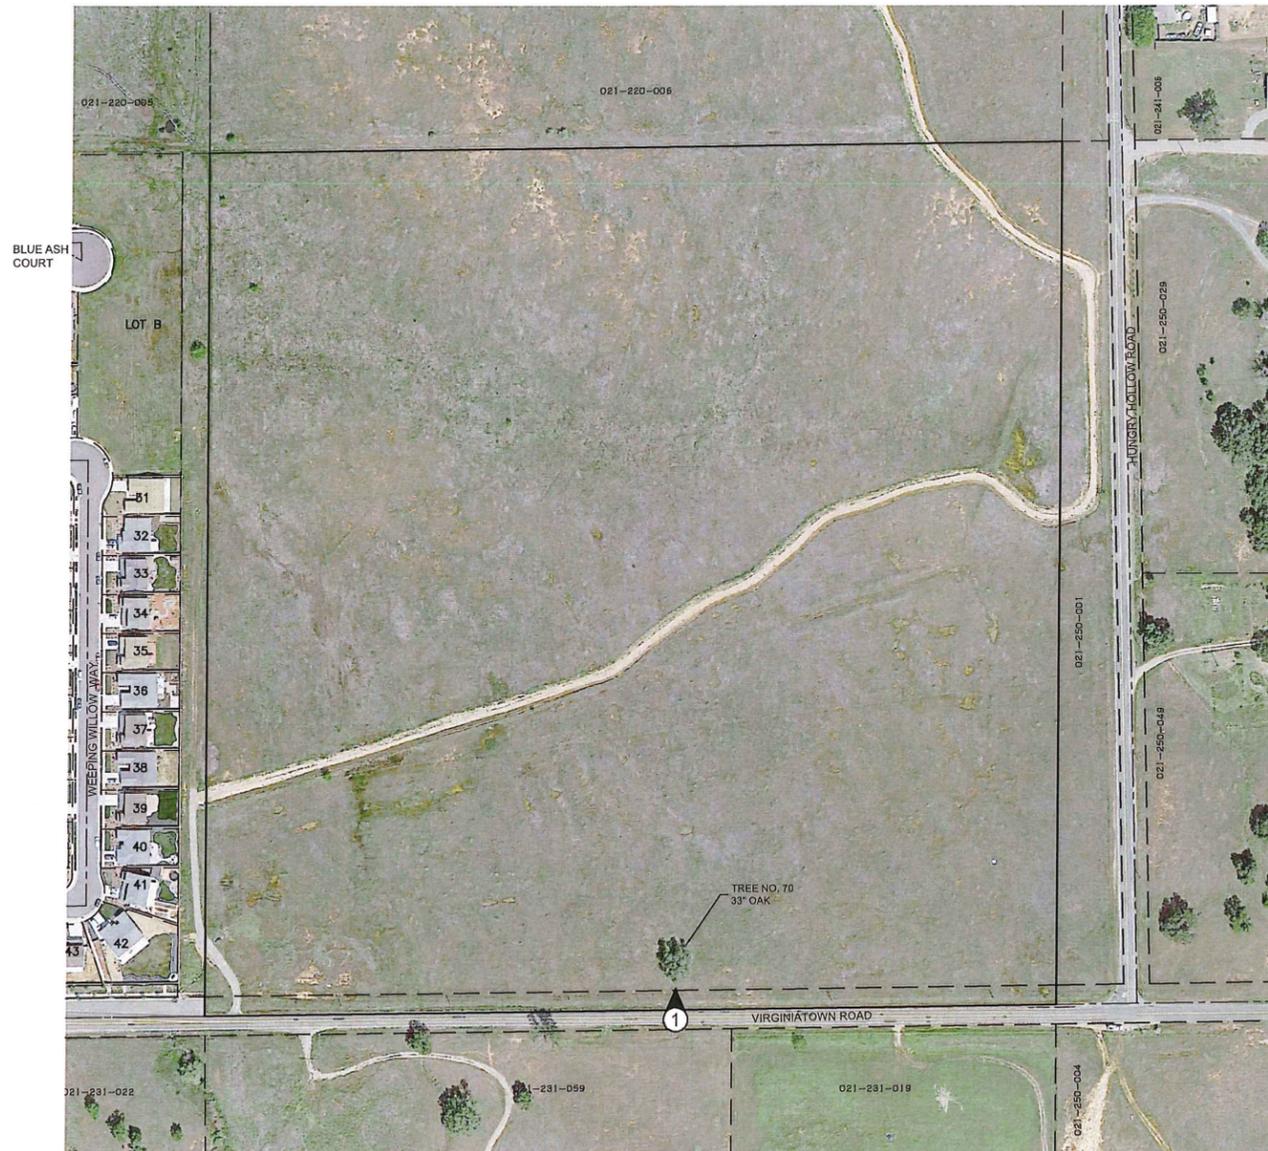

**TREE EXHIBIT**  
**LINCOLN MEADOWS**  
 CITY OF LINCOLN - PLACER COUNTY - CALIFORNIA  
 OCTOBER 8, 2014 SCALE: 1"=100'  
 BAKER-WILLIAMS ENGINEERING GROUP

**BW** BAKER-WILLIAMS ENGINEERING GROUP  
 Engineering / Surveying / Land Planning / Entitlement Processing / GPS Services  
 6020 Rutland Drive, Suite 19 ~ Carmichael CA 95608  
 (916) 331-4335 ~ fax (916) 331-4430 ~ office@bwengineers.com